

QUICK DRYING WOOD GRAIN FILLER LACQUER BASED

An incredible time saver! This transparent, nitrocellulose lacquer based grain filler dries in 10 to 15 minutes. Seals and grain fills in a single step. This is not a sanding sealer. Grain filling can be achieved in about four hours, grain dependant, of course. Top coat thereafter. Excellent product wherever productivity, and cost are a major issue. This product was used throughout Wynn Las Vegas casino's woodwork, especially the mahogany, with breathtaking results, just visit their website. Apply by brush or spray as per label directions.



Wait one hour then sand smooth only (with the grain), do not sand off. Repeat second application*. In brushing application, the drying time may have to be slightly retarded with Magna-Shield® Retarder for better flow-out.

Available in natural color only, but tintable with our Penetrating Stain (solvent based) or our U-T-C Colorants. Can be top coated with most lacquers, vinyl sealers, Magna-Shield®, conversion varnishes, HYDROCOTE® brand water-based finishes and most other water-based finishes including latex paints. Coverage, about 400 sq ft per gallon.

Available now also in water-clear version for light woods or stains.

For optimum results, consult label directions prior to use.

97430	Straw Color	Quart
97431	Straw Color	Gallon
97435	Straw Color	Pail
97500	Water Clear	Quart
97501	Water Clear	Gallon
97505	Water Clear	Pail
MS9900	(Retarder)	Quart
MS9901	(Retarder)	Gallon

Enhanced Formula*

*No limit on number of coats to be applied because of improved clarity.

HYDROCOTE® QUICK DRYING WOOD FILLER

New



Water-based version to the above lacquer based grain filler. Apply by brush or spray. Seals and fills the grain in a single step.

Available in natural color. Tintable with our HYDROCOTE® Tinting Colors or the Penetrating Stain. Can be topcoated with HYDROCOTE® brand water-based finishes, most other water-based finishes including latex paints, our EVERLAST™ Wood Finish and most conventional lacquers.

Coverage, about 400 sq ft per gallon.

61700	Quart
61701	Gallon
61705	Pail

For best results, consult label directions prior to use.

PASTE WOOD GRAIN FILLER CONVENTIONAL (OIL-BASED)



Superior quality conventional oil-based wood filler. Use to fill open pores and impart contrasting color to the grain. A must for high grade rubbed out finishes on open grain woods. May be tinted with our U-T-C Tinting Colors, Penetrating Stain, or Japan Colorants. Minimum drying time is 24 hours prior to finishing. Thin with VM&P Naphtha or other solvent spirits to speed up drying time to 12 hours prior to finishing.


Temporarily Out Of Stock Call For Updates

For optimum results, consult label directions prior to use.

97420-01	Natural	Quart
97421-01	Natural	Gallon
97420-02	Mahogany	Quart
97421-02	Mahogany	Gallon
97420-03	Walnut	Quart
97421-03	Walnut	Gallon

PASTE WOOD FILLER APPLICATORS

6 or 8 inch wide plastic applicators designed to reduce elbow grease and sanding time of oil-based conventional paste wood fillers upon drying, our brand or any other of similar type. Provides better packing in the grain (thus minimizes shrinkage with cure) as well as reduces product waste. For best results, apply the paste wood filler by brush, with the grain, then remove the excess with this applicator working against the grain holding the applicator at 45° angle, followed by with the grain holding at 45° angle as well to leave surface filler free and much easier to sand.

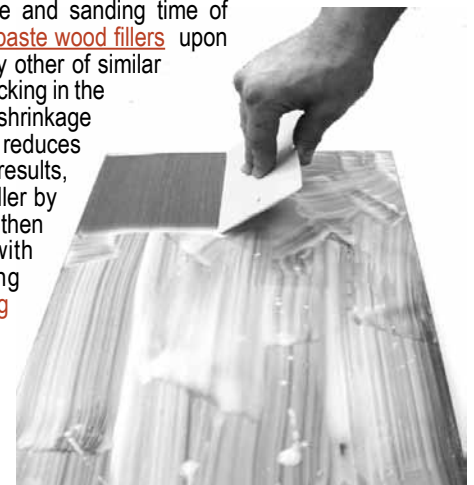

31025	(6")
31026	(8")